


4 HOLES ISO UNIDIRECTIONAL GEAR PUMP
4 DELİKLİ ISO TEK YÖNLÜ DİŞLİ POMPA



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm2/s)	22	32	46	68
Optimal kinematic viscosity			VG= 10 cSt < 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested	VI > 100		Working temperature		
			-15°C +100°C		
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0,3 - 2 bar		

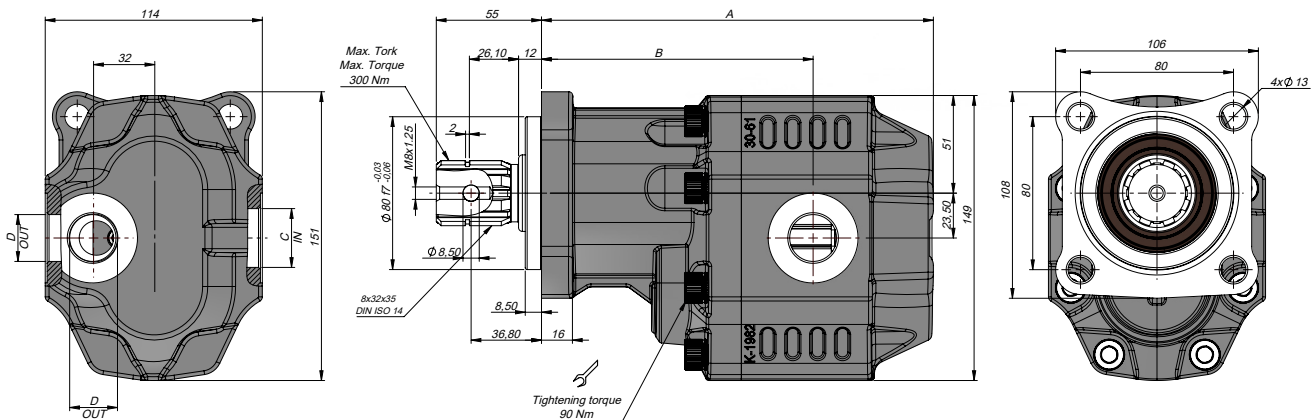

Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basınç Max. Intermittent Pressure	Maks. Anlık Basınç Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	Ç	D
G300175F111	G300175F121	17	290	315	325	2500	3000	300	173	124.5	G1/2"	G1/2"
G300225F111	G300225F121	22							177	126	G3/4"	
G300275F111	G300275F121	27							179	129.5		
G300345F111	G300345F121	34	280	300	310	2200	2800		184	130.5	G1"	G3/4"
G300435F111	G300435F121	43	270	290	300	2000	190		135.5			
G300515F111	G300515F121	51	240	260	280		195		135.5			
G300615F111	G300615F121	61	220	240	250	1900	205		142	G1 1/4"	G1"	
G300735F111	G300735F121	73	205	225	230		208		144.5			
G300825F111	G300825F121	82					214		146			
G301005F111	G301005F121	100	180	200	220	1500	1800		227	160	G1 1/4"	G1" G3/4" (Alternative)
G301255F111	G301255F121	125	160	180	200				243	164		