
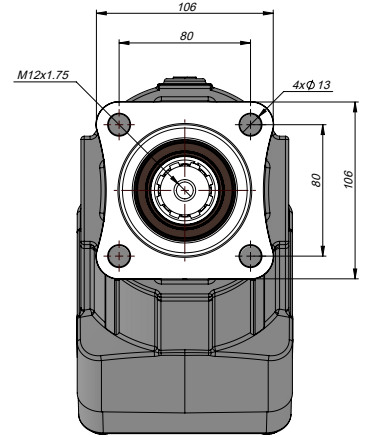
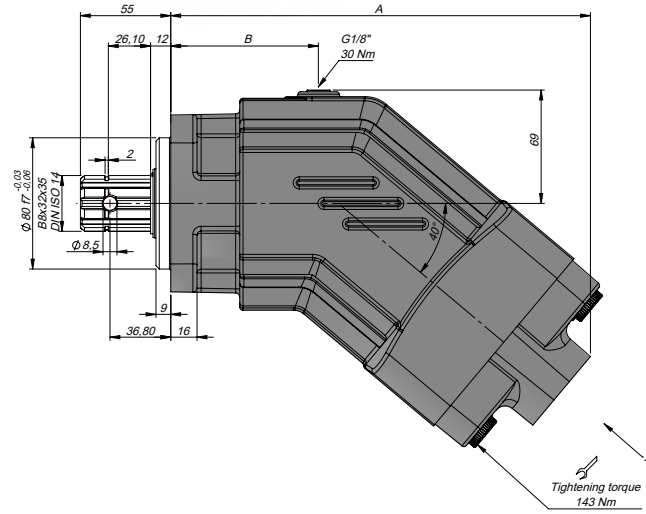
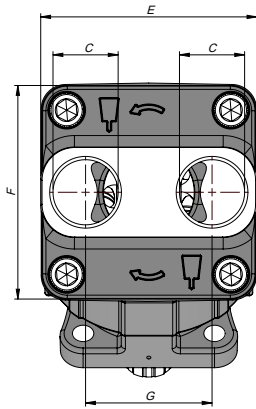
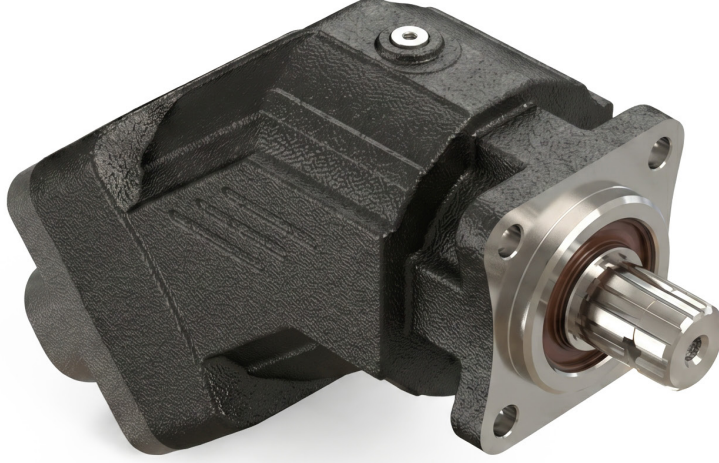


4 HOLES ISO BENT AXIS PISTON MOTOR

4 DELİKLİ ISO EKSENEL PİSTONLU MOTOR


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Kod Code	İletim Hacmi Displacement	Maks. Sürekli Basınç Max. Continuous Pressure	Maks. Anlık Basınç Max. Peak pressure	Maks. Hız Max. speed (RPM)		A	B	C	E	F	G	Tapaların Sıkma Torku Tightening Torque Of The Plugs	
	(cm ³ /rev)			nom	max								
AM0235F131	23	350	400	3050	4300	180	58	G3/4"	89	89	52	G1/2"	55-65Nm
AM0325F131	32			2750	3900				89	89	52		
AM0455F131	45			2650	3800	210			108,7	108,7	59	G3/4"	90-100Nm
AM0565F131	56			2550	3700	218	80	G1"	110,5	108	64		
AM0635F131	63			2200	3200				110,5	108	64	G1"	135-160Nm
AM0805F131	80			2150	3100	245	94	G1 1/4"	127	118	69		
AM1075F131	107	300	350	2000	2800				131,6	130	77	G1 1/4"	200-230Nm
AM1255F131	125			1750	2500				131,6	130	77		